

PHILIPPGROUP

PHILIPP Marking ring




VB3-T-019-en - 01/16

Data sheet

PHILIPP Marking ring

The Marking ring is part of the PHILIPP Threaded anchor system and is used for marking the installed anchor. The plastic Marking ring is put over the threaded insert during the installation of the anchor. Afterwards the threaded anchor is fixed to the mould (Picture 2).

Due to the colour-coded marking a quick and correct classification of the corresponding lifting device is ensured (Picture 3).

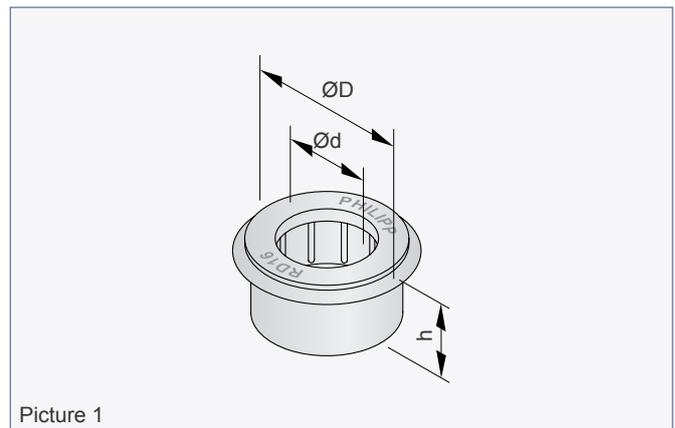


Picture 1


Table 1: Dimensions of the Marking ring

Ref.-No.	Type [RD/M]	$\varnothing D$ [mm]	$\varnothing d$ [mm]	h [mm]	Colour code	Weight [kg/100 pcs.]
74KR12	12	26	13	15	Pastel orange	0.19
74KR14	14	30	15	15	Pure white	0.24
74KR16	16	31	17	15	Flame red	0.25
74KR18	18	35	19	15	Light pink	0.30
74KR20	20	37	21	15	Pastel green	0.33
74KR24	24 ①	41	25	15	Jet black	0.37
74KR30	30 ①	52	31	15	Emerald green	0.56
74KR36	36 ①	57	37	15	Light blue	0.62
74KR42	42	64	43	15	Silver grey	0.72
74KR52	52	80	53	15	Sulfur yellow	1.06
74KR56	56	83	57	15	Pastel orange	1.20
74KR60	60	89	61	15	Pure white	1.35

① When using threaded anchors in stainless steel please refer to data sheet „Marking ring with clip“

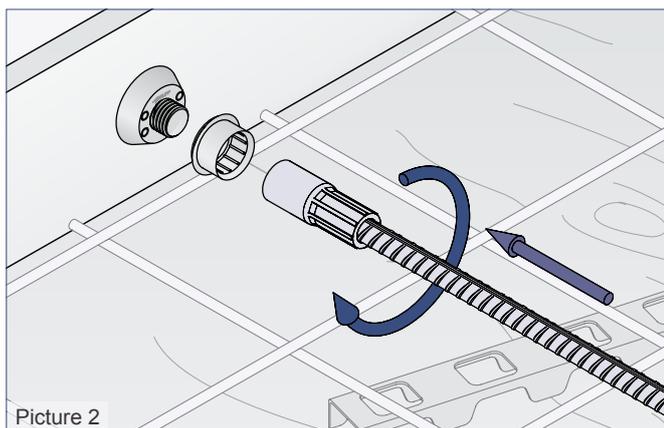

Picture 2

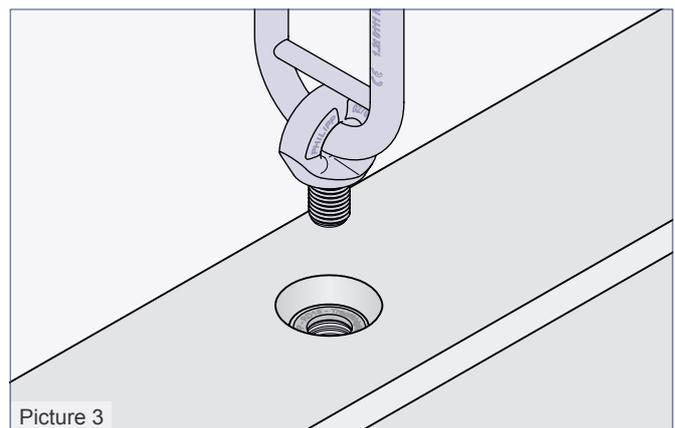

Picture 3