

PHILIPP GROUP

PHILIPP Sealing cap (plastic)



VB3-B-023-en - 01/16

Data sheet

PHILIPP Sealing cap (plastic)

The Sealing caps (plastic) are used to close female threads. They can be used for all sizes of the Threaded anchor system regardless of whether a Nailing plate is used or the thread is installed flush to the surface. Therefore, the penetration of dirt is not possible using the Sealing caps. A permanent corrosion protection is only partially given as a penetration of water into the sealed socket cannot be excluded.












 The Sealing cap (plastic) (72KAS_) cannot be combined with Marking rings at all (Picture 4).

Table 1: Dimensions Outside cap

Ref.-No.	Type [RD/M]	ØD [mm]	H [mm]	Colours	Weight [kg/100 pcs.]
72ASS12	12	18	10	 Concrete grey	0.06
72ASS14	14	21	12	 Concrete grey	0.11
72ASS16	16	25	13	 Concrete grey	0.14
72ASS18	18	28	14	 Concrete grey	0.19
72ASS20	20	34	15	 Concrete grey	0.29
72ASS24	24	35	17	 Concrete grey	0.38
72ASS30	30	42	19	 Concrete grey	0.53
72ASS36	36	52	19	 Concrete grey	0.73
72ASS42	42	60	20	 Concrete grey	0.96
72ASS52	52	73	22	 Concrete grey	1.33

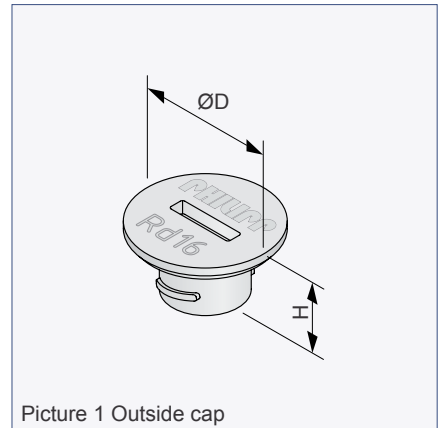














Table 2: Dimensions Sealing cap

Ref.-No:	Type [RD/M]	ØD [mm]	H [mm]	Colours	Weight [kg/100 pcs.]
72KAS12	12	16	8	 Transparent	0.07
72KAS14	14	16	9	 Transparent	0.07
72KAS16	16	20	10	 Transparent	0.09
72KAS18	18	22	8	 Transparent	0.11
72KAS20	20	25	11	 Transparent	0.14
72KAS24	24	28	12	 Transparent	0.21
72KAS30	30	36	15	 Transparent	0.40
72KAS36	36	36	15	 Transparent	0.40
72KAS42	42	42	18	 Transparent	0.63
72KAS52	52	56	12	 Transparent	0.69
72KAS56	56	63	21	 Transparent	0.67
72KAS60	60	63	21	 Transparent	0.73

